




- WPC-501R**
1. Print on Matte Paper 500 gm2 .
2. Print is CMYK.
3. Use Matte Lamination.
4. Do not print NOTES, PLACEMENT, SCORING and DIELINE layers.
5. Use Spot Gloss UV Coating
For exact shape and locations see layer "Spot UV Coating".
6. For Tray Use white PS plastic, 0.7mm thickness

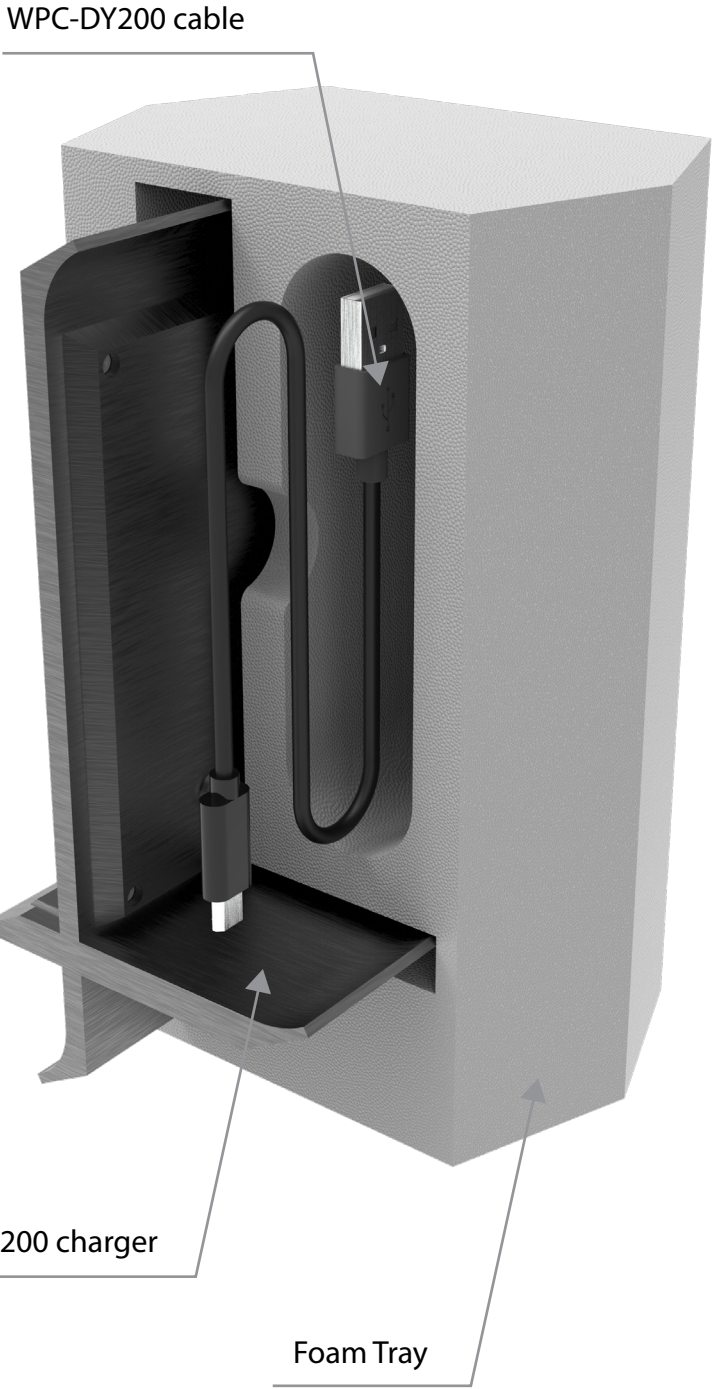

PRINT EFFECTS & INSTRUCTIONS

PMS 368 C	BLACK 20%	BASIC PACKAGE PMS COLORS
		EMBOSS WHITE & UV COATING (no black outline)
		EMBOSS RUSHED METALLIC SILVER 877 C (OR WHICHEVER PANTONE LOOKS BETTER)
		UV COATING (dont print pink color, for indication only)

